

AmeriFlow®

SUBMITTAL DRAWING

- MATERIAL: .018 GALVANIZED STEEL
- NO. G1700 DAMPERS INSTALL DIRECTLY INTO PROVIDED COLLAR SLOTS
- BUILT IN BEAD FOR FLEX DUCT INSTALLATIONS
- A O.D. = DUCT SIZE MINUS 1/16
- PUSH CLIPS MOUNT THE COLLAR TO PRE-PUNCHED BACK PANEL HOLES
- SIZES AVAILABLE: 6, 8, 10, 12, 16 & 18 (14 INCH COLLAR FACTORY INSTALLED)

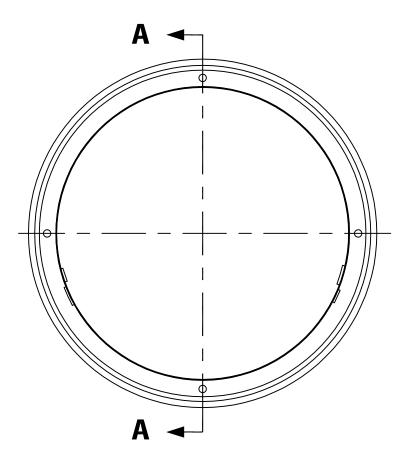

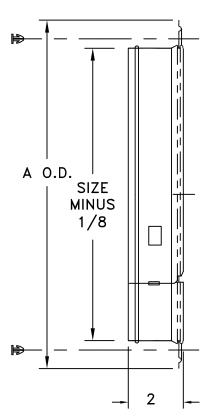

SIZE	A O.D.
6	14
8	14
10	14
12	14
14	16
16	20
18	20

SECTION A-A

NOTE:

THIS COLLAR CAN BE USED ON T—BAR PRODUCTS THAT HAVE A MOLDED FIBERGLASS BACK PANEL. ATTACHMENT REQUIRES BAYONET CLIPS PROVIDED WITH COLLAR.

JOB NAME:	SUBMITTED BY:	DATE: 05/18/05	AMF-54	
LOCATION:		G6400C COLLAR		
ARCHITECT:				
ENGINEER:				
CONTRACTOR:				